



In The Groove

Commercial Laminate Collection









Features

Available in a variety of wood species visuals and two plank sizes: 1967 is 5¼" W x 47¼" L and Boho 7½" W x 54¹¹/₃₂" L

Commercial laminate featuring durable AC4 rated wear surface with aluminum oxide

Floating installation with Uniclic® Locking System patented technology

Resistance to indentation, scratching, fading and staining

A complete range of moldings and transitions are available to coordinate with both styles

FloorScore Certified and CARB II compliant, meets or exceeds NALFA certified product testing standards




Construction

Design Features

- Natural wood visuals with traditional to modern colorations
- Substantial widths provide updated visuals

Enhanced Finish

- AC4 rated wear surface with aluminum oxide
- Protects against normal wear
- Provides durability for light commercial traffic
- Easy maintenance

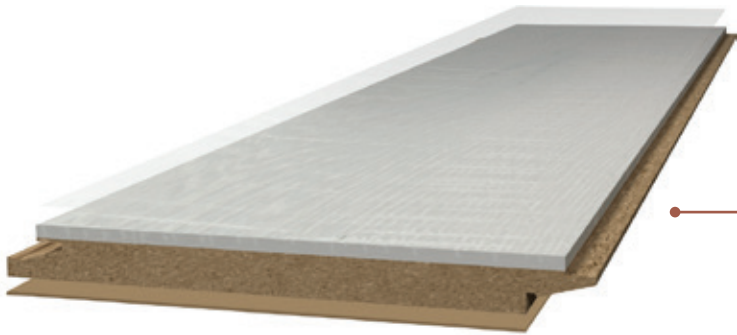

Installation Methods


- Quick, adhesive-free installation
- Float over SilentGuard™ underlayment, designed to improve acoustics
- Tight connection between joints keeps dirt out
- Immediate occupancy, no acclimation needed
- Individual planks can be easily replaced

Balancing Layer

- Ensures greater dimensional stability

Uniclic® Technology


- Patented locking profile on all sides of the panel
- Clicks together using either horizontal or angled method
- 12mm thickness provides strength for light commercial interiors
- Constructed with HDF (High Density Fiberboard) offering superior impact resistance and joint integrity



Enhanced Finish with Aluminum Oxide

Aluminum Oxide is the second hardest mineral under diamonds, making it a proven performance solution for protection against foot traffic wear.

MOHS HARDNESS SCALE

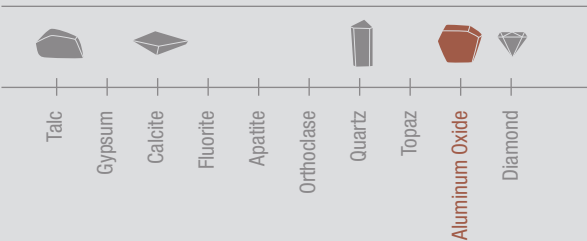

Colorways

1967 - 5 1/4" W x 47 1/4" L (AC4 rated wear surface with aluminum oxide)



04 Sunbeam Acacia



10 Crisp Autumn Oak



12 Soft Copper Oak



14 Honey Blonde Maple

Boho - 7 1/2" W x 54 11/32" L (AC4 rated wear surface with aluminum oxide)



01 Fawn Chestnut



03 Knotted Chestnut



04 Earthen Chestnut



05 Sandcastle Oak



06 Driftwood Oak

Due to the natural characteristics of laminate, planks will vary. Some wood species have more color and graining variation than others making each installation unique. Photography is representative of the product species and will vary with each installation.



Boho, 01 Fawn Chestnut

Molding Profiles

All colors coordinate with laminate styles



5 in 1 Molding



Overlap Stairnose




Quarter Round




1
T-Molding
(Expansion Profile)
Connects two sections
of floors of equal height.




2
Square Nose
(End Profile) Finishes
floor at a doorway,
fireplace or wall.




3
Carpet Reducer
(End Profile) Creates
a transition from a
floor to carpet.



4
Hard Surface Reducer
(Adaptor Profile) Provides a
smooth transition from one
floor to a lower-height floor.



5
Stair Nose
(End Profile) Used to complete a
laminate stair installation in either a
flushmount or overlap application.



Specifications

Collection Name	In The Groove Collection
Style Names	Boho / 1967
Brand	Mohawk Group - Hard Surface
Product Type	Commercial Laminate



DESIGN	
Overall Thickness	15/32" (12mm)
Finish	AC4 rated wear surface with aluminum oxide
Colors Available / Size	Each color only available in size shown
Boho	5 colors - 7 1/2" W x 54 11/32" L
1967	4 colors - 5 1/4" W x 47 1/4" L
Packaging	
Boho	16.93 sq. ft. per ctn
1967	13.75 sq. ft. per ctn
Format	Single plank design with micro-beveled edges/ends
Core	HDF (High Density Fiberboard)
Trim & Moldings	Color coordinating trims and moldings: multi-purpose 5-in-1 molding (t-molding, square nose, carpet reducer, hard surface reducer, stair nose) and quarter round



PERFORMANCE	
Construction	Commercial Laminate
Classification	NALFA/ANSI LF-01-2011
Wear Resistance	Meets or exceeds NALFA Level 3 - AC4 rated wear surface
Caster Chair Resistance	Meets or exceeds NALFA Level 4
Large Ball Impact Resistance	Meets or exceeds NALFA Level 4
Small Ball Impact Resistance	Meets or exceeds NALFA Level 4
Static Load Limit	Meets or exceeds NALFA Level 4
Thickness Swell	Meets or exceeds NALFA Level 4
Coefficient of Friction	ADA Compliant; 0.6 Dry
Stain Resistance	Meets or exceeds NALFA Level 4
Light Resistance	Meets or exceeds NALFA Level 4
Smoke Density	ASTM E662 - Passes - < 450
Radiant Panel	ASTM E648 - Passes - Class 1



INSTALLATION	
Primary Install Method	Uniclic® Locking System
Underlayment Option	Float over SilentGuard™ underlayment (no adhesive required)
Grade Level	On, Above or Below Grade



SUSTAINABILITY	
Certification	FloorScore® Certified CARB II Compliant NALFA Certified



SERVICE	
Warranty	Limited 5 Year Light Commercial Warranty