




Variant Form
Collection

 Mohawk Group



Variant Form explores the idea that form and function can be equally beautiful. Three patterns recall the aesthetics of exposed architectural elements – trusses, beams, railings – and the raw, unexpected textures and light/shadow interplay that they bring to spaces. Variant Form's styles and colors can be combined to create shifting floorscapes that integrate industrial elements with creative possibility for exciting, inspiring designs.





Integrate, Reconstruct and Diffuse | Brick Ashlar Installation, color 983
Cover: Integrate, Reconstruct and Diffuse | Brick Ashlar Installation, colors 983 and 999







Diffuse | Herringbone Installation, colors 999 and 983
combined with Lineate | Herringbone Installation, color 988



Hot & Heavy Collection Lineate

Lineate 957 Cord, 988 Striated

Lineate Enhanced Resilient Tile combines ombré gradations of color with textile-like striations, resulting in a richly dimensional visual. Colors can be mixed or used singularly to create abstract, modern flooring designs. Lineate is inspired by two of the hottest trends in surface visuals: ombre/gradient and striated textile looks. The color ebbs and flows across the plank to give the illusion of depth on a flat surface, enhancing the dimension of any space.

- 12 colorways include on-trend color pops to warm and cool neutrals
- Oversized 9" x 59" planks install over large areas quickly
- 20 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane and polish-optional finish for versatile, cost effective maintenance
- Non-skid backing keeps planks in place
- Twice as thick as traditional ERT for seamless transition with Mohawk Group carpet tiles
- IIC rating of 57 with drop ceiling, without underlayment
- Installs over slabs up to 95% RH
- 59% Recycled Content: 37% pre-consumer and 22% post-consumer



For over 15 years Colorstrand fiber has continually exceeded the demanding expectations of our customers for their projects. With the design flexibility and color intensity of solution dyed fiber, Colorstrand delivers lasting beauty and value. And Colorstrand has the added benefit of third party UL certified 25% recycled content.

PERFORMANCE

- Unsurpassed colorfastness to light, atmospheric contaminants, and harsh cleaning agents in Colorstrand SD
- Sentry Plus Soil® and Stain Protector keeps your investment looking newer longer
- Can be engineered to achieve the most severe TARR ratings

BUDGET

- Internally extruded fiber allows cost control of products
- Numerous broadloom and modular products available at value engineered budgets

SUSTAINABILITY

- 25% certified Pre-Consumer Recycled Content* (third party certified by Underwriters Laboratory[®])
- Mohawk products tufted with Colorstrand are CRI Green Label Plus® certified for VOC emissions
- Recyclable through Mohawk's ReCover Program

DESIGN


- A wide variety of colors for excellent design flexibility

SERVICE

- Many Quickship Styles serviced off the shelf with several more QS styles within 10 days providing what you need when you need it
- 100% vertically integrated providing unsurpassed lead times and service reliability

EcoFlex™ ICT

carpet tile backing

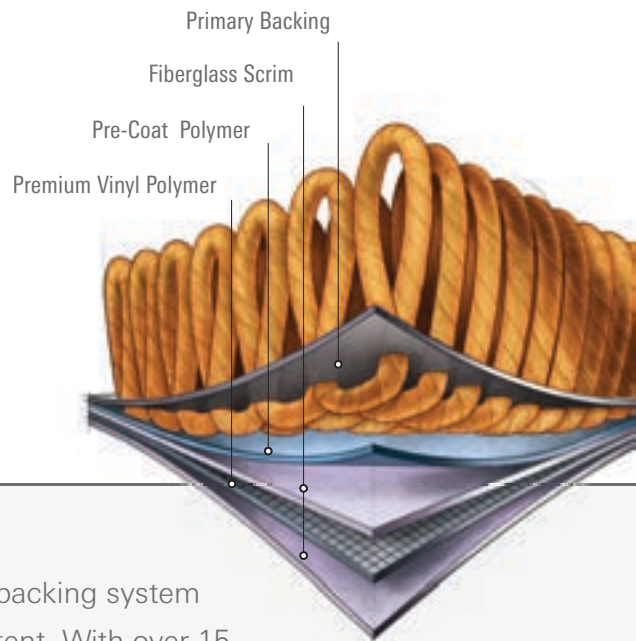

EcoFlex™ ICT is a premium vinyl carpet tile backing system containing a minimum of 35% recycled content. With over 15 years in the marketplace, its ultra dense construction is engineered to offer superior performance while giving greater cushioning properties.



PERFORMANCE

- Unsurpassed dimensional stability – no growing or shrinking
- Constructed with an ultra dense five layer cushion backing system
- Main body of tile provides an effective moisture barrier (not applicable at the seams)
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 15 years



BUDGET

- Superior construction offers reliability for the life of your installation



SUSTAINABILITY

- EcoFlex ICT contains 35% minimum pre consumer recycled content by total weight*
- Recyclable through Mohawk Group's ReCover program
- EcoFlex ICT may contribute to or comply with LEED® credits MR 4.0, IEQ 4.3 and Innovation credit for NSF 140
- CRI Green Label Plus certified
- Free of EPA phthalates of concern

- Certified at the Gold Level in accordance with NSF/ANSI 140 the Sustainability Assessment for Carpet



SERVICE

- Engineered performance for an overall better after sales service experience

Upgrade to NXT or NXT AIR for Red List Free. Minimum required, contact your local representative for details.

* Recycled content claim third party verified by UL (Underwriters Laboratory)



The Leader in Transparency and Red List Free Products

Mohawk Group leads the building products industry in transparency with the largest selection of products with Declare Labels, Health Product Declarations (HPDs), and Environmental Product Declarations (EPDs). What’s more, we offer over 500 Red List Free Declared products.


OUR COMMITMENT

As a Gaia sponsor of the International Living Future Institute (ILFI), we are committed to revolutionary programs that are redefining the green building movement. These include the ILFI’s Living Building Challenge and Declare programs.

Declare Labels are a ‘nutrition label’ for the building industry, providing ingredients, source and manufacturing locations. We offer you:

- The most products with Declare Labels
- The most Red List Free products

We have eliminated the mystery of product ingredients so you get total product transparency.*

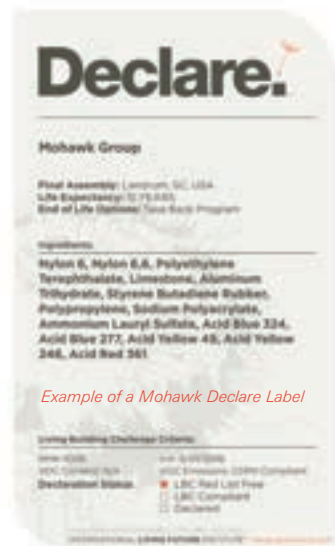

Mohawk Group utilizes multiple platforms for disclosing our transparency information, including: Designer Pages, Mindful Materials and the Declare Database.”

* Transparency documentation can be found at www.mohawkgroup.com


24BY24	Style Name / Number	Integrate / BT423
	Construction	Tufted
	Surface Appearance	Textured Patterned Loop
	Gauge	1/12" (47.00 rows per 10 cm)
	Dye Method	Solution Dyed
	Fiber Type	Colorstrand® SD Nylon
	Stain Release Technology	Sentry Plus Stain Protection
	Soil Release Technology	Sentry Soil Protection
	GSA Stain Release Rating	Passes
	Backing Material	EcoFlex ICT
	Indoor Air Quality	Green Label Plus Certified # 1098
	NSF 140	Gold
	Size	24" x 24" (.6096 m x .6096 m)
	Installation Method	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi-Directional
	Flammability	ASTM E 648 Class 1 (Glue Down)
	Smoke Density	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static	

24BY24	Style Name / Number	Reconstruct / BT424
	Construction	Tufted
	Surface Appearance	Textured Patterned Loop
	Gauge	1/12" (47.00 rows per 10 cm)
	Dye Method	Solution Dyed
	Fiber Type	Colorstrand® SD Nylon
	Stain Release Technology	Sentry Plus Stain Protection
	Soil Release Technology	Sentry Soil Protection
	GSA Stain Release Rating	Passes
	Backing Material	EcoFlex ICT
	Indoor Air Quality	Green Label Plus Certified # 1098
	NSF 140	Gold
	Size	24" x 24" (.6096 m x .6096 m)
	Installation Method	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic / Multi-Directional
	Flammability	ASTM E 648 Class 1 (Glue Down)
	Smoke Density	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static	

12BY36	Style Name / Number	Diffuse / BT425
	Construction	Tufted
	Surface Appearance	Textured Patterned Loop
	Gauge	1/12" (49.00 rows per 10 cm)
	Dye Method	Solution Dyed
	Fiber Type	Colorstrand® SD Nylon
	Stain Release Technology	Sentry Plus Stain Protection
	Soil Release Technology	Sentry Soil Protection
	GSA Stain Release Rating	Passes
	Backing Material	EcoFlex ICT
	Indoor Air Quality	Green Label Plus Certified # 1098
	NSF 140	Gold
	Size	12" x 36" (.3048 m x .9144 m)
	Installation Method	Monolithic / Half-Lap / Brick Ashlar / BasketWeave / Plank Half-Lap / Monolithic Stepping / Random / Herringbone
	Flammability	ASTM E 648 Class 1 (Glue Down)
	Smoke Density	ASTM E 662 Less than 450
	Static Propensity	AATCC - 134 Under 3.5 KV
	Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static	

For Lineate spec information, visit our website at www.mohawkgroup.com

Installation Instructions:

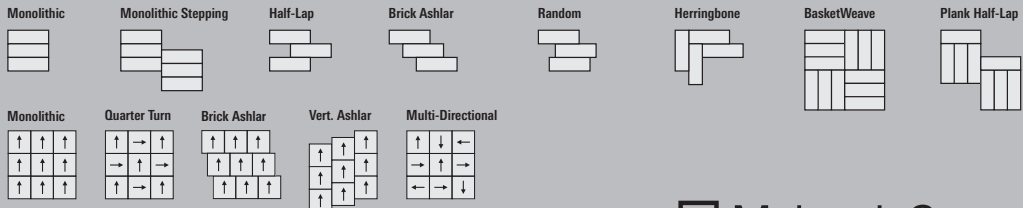

Mohawk Group

Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



glue